

QUALITY RUNS IN OUR PIPES

R.M. EXPORTS

HOSE — CATALOGUE

BRANDS

ROMO **RAV**

RMX
TRA HEAVY DUTY


DINO-HIDE
LIGHTER • STRONGER
SERIES



R.M. EXPORTS

72-73 Industrial Estate Extention
Jalandhar, Punjab - 144012, India
Ph: +91 181 2611120, +91 9872997902
Email: sales@rmexports.com
krastogi@rmexports.com

www.rmexports.com

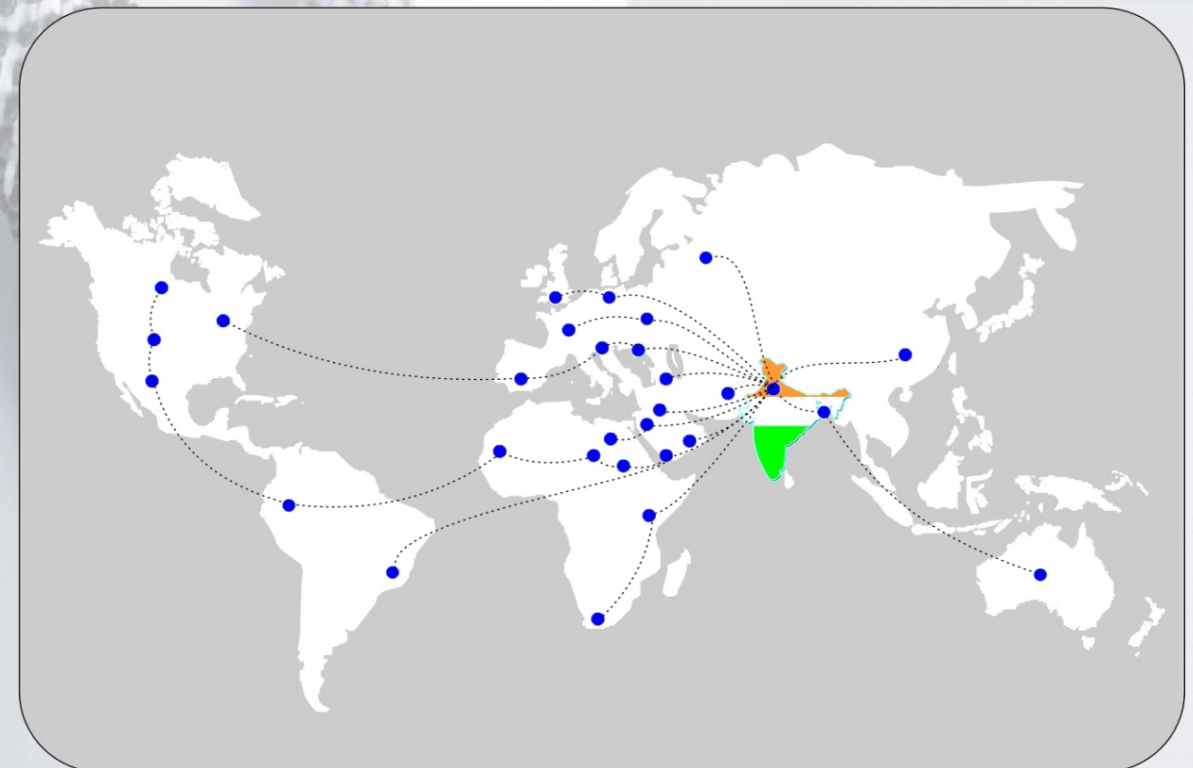

Disclaimer

This catalog has been made around the Jan.2012 Product Range
The products and their specifications can be and are changed by the company
due to constant development and market changes.
The range is not limited to this catalog.

R.M. EXPORTS INDIA

COMPANY OVERVIEW

Since its founding in the year of 1992, **R.M. Exports, India** has been engaged in the manufacturing and marketing of various types of commercial and industrial rubber hoses. The sincere dedication towards quality, a high-tech manufacturing unit, customer focus and support and decades of experience has made the company the largest exporter of rubber hoses from the country. With a wide variety of Rubber Hoses (long lengths and with fittings also) and Tubes (for Scooter, Car, Jeep, ADVs, Tractor etc.), the company prides itself on quality, service and trust developed over the years which has helped it earn regard from its satisfied customers.

R.M. Exports is a certified manufacturer and exporter of Twin Welding Hose, Pneumatic Tool Hose, Pneumatic Air Hose, Welding Hose and Water Delivery Hose, and Tubes. The firm's trademarks for hoses RMX is assurance of quality international standard products. The products are put to use across most of the world by a wide variety of industries – Workshops, Oil Refineries, Ship Building, Repair Yards, Steel Mills, Service stations, Garages etc. However, the use market is not limited to the industries for the products are as popular for personal and commercial uses too.

The persistent R&D has kept the company adapt to the changing times, and even set standards in quality and create breakthrough products like the DinoHide Rubber Hoses, to name one. High technology manufacturing facilities and use of superior quality raw material ensure a product that is oil and abrasion resistant. The economical pricing, customizable lengths, efficient deliveries to maintain low inventory level and superior quality has helped R.M. Exports and its associates to develop a stronghold in the international markets, as well as the Indian domestic market.

RUBBER HOSE CATALOG JANUARY, 2012

Disclaimer

This catalog has been made around the Jan.2012 Product Range
The products and their specifications can be and are changed by the company
due to constant development and market changes.
The range is not limited to this catalog.

TABLE OF CONTENTS

Content	Page No.
Company Overview	1
Table of Contents	3
AIR HOSE - RMX	4
AIR HOSE - RAV	6
AIR HOSE - ROMO	8
AIR HOSE - DINO-HIDE	10
AIR HOSE - RAV - OIL RESISTANT	11
WATER HOSE - RMX	12
WATER HOSE - RAV	14
WATER HOSE - ROMO	16
WATER HOSE - DINO-HIDE	18
WELDING HOSE - RMX	20
TWIN WELDING HOSE - RMX	21
WELDING HOSE - RAV	23
TWIN WELDING HOSE - RAV	24
WELDING HOSE - ROMO	25
TWIN WELDING HOSE - ROMO	26
WELDING HOSE - DINO-HIDE	28
ALSO AVAILABLE	29
ON-SHELF PACKING OPTIONS	30




HEAVY DUTY AIR HOSE

Technical Specifications

Tube	High Strength, Versatile, Oil Mist Resistant Rubber
Cover	Smooth; Abrasion, Weather & Ozone Resistant EPDM Rubber
Reinforcement	Single or Multiple Layers of High Strength Polyester Yarn
Fittings	Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules
Pressure	W.P.: 200PSI, 250PSI, 300PSI Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)
Oil Resistance	Exceeds RMA Class 'C' Oil Resistance
Accessories	Bend-Restrictor Sleeve to prevent damage near ends Thread Protector Cap
Advantages	Heavy Duty for Professional use Excellent Mechanical Properties High Burst Strength Stays Flexible in - 40° F to 190° F



SIZES(IDs)
1/4" to 1"
LENGTHS
25', 50', 100'Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

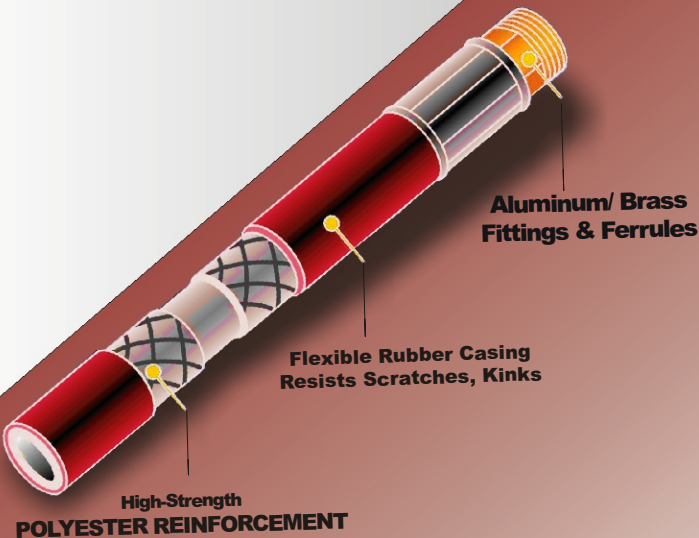

Application Guide:	Excellent	Very Good	Good
Light Weight			
Cold Weather Flexibility			
Resists Twisting			
Non Marring			

Multiple fittings and packing options available.

RMX AIR HOSE COILS - PRE-CUT WITH FITTINGS

Part No .	ID	Length	Fitting	Coils/ Carton
W . P . 3 0 0 P S I / 2 0 B A R		H D H Series		
H D H 0 6 0 2 5	1 / 4 "	2 5 '	1 / 4 " N P T	8
H D H 0 6 0 5 0	1 / 4 "	5 0 '	1 / 4 " N P T	6
H D H 0 6 1 0 0	1 / 4 "	1 0 0 '	1 / 4 " N P T	4
H D H 1 0 0 2 5	3 / 8 "	2 5 '	1 / 4 " N P T	8
H D H 1 0 0 5 0	3 / 8 "	5 0 '	1 / 4 " N P T	6
H D H 1 0 1 0 0	3 / 8 "	1 0 0 '	1 / 4 " N P T	2
H D H 1 3 0 2 5	1 / 2 "	2 5 '	3 / 8 " N P T	6
H D H 1 3 0 5 0	1 / 2 "	5 0 '	3 / 8 " N P T	4
H D H 1 3 1 0 0	1 / 2 "	1 0 0 '	3 / 8 " N P T	2
H D H 0 8 0 2 5 *	5 / 1 6 "	2 5 '	1 / 4 " B S P	8
H D H 0 8 0 5 0 *	5 / 1 6 "	5 0 '	1 / 4 " B S P	6
H D H 0 8 1 0 0 *	5 / 1 6 "	1 0 0 '	1 / 4 " B S P	2
* Safety Ratio 3 : 1 B . P . : W . P .				

Part No .	ID	Length	Fitting	Coils/ Carton
W . P . 2 5 0 P S I / 1 7 . 5 B A R		H D M Series		
H D M 0 6 0 2 5	1 / 4 "	2 5 '	1 / 4 " N P T	8
H D M 0 6 0 5 0	1 / 4 "	5 0 '	1 / 4 " N P T	6
H D M 0 6 1 0 0	1 / 4 "	1 0 0 '	1 / 4 " N P T	4
H D M 1 0 0 2 5	3 / 8 "	2 5 '	1 / 4 " N P T	8
H D M 1 0 0 5 0	3 / 8 "	5 0 '	1 / 4 " N P T	6
H D M 1 0 1 0 0	3 / 8 "	1 0 0 '	1 / 4 " N P T	2
H D M 1 3 0 2 5	1 / 2 "	2 5 '	3 / 8 " N P T	6
H D M 1 3 0 5 0	1 / 2 "	5 0 '	3 / 8 " N P T	4
H D M 1 3 1 0 0	1 / 2 "	1 0 0 '	3 / 8 " N P T	2

RMX AIR HOSE COILS - CUSTOM LENGTHS

Part No .	ID		WORKING PRESSURE		
	M M	I N C H	B A R	M P a	P S I
H D H 0 6	6.3	1 / 4	21.0	2.0	300
H D H 0 8	8.0	5 / 1 6	21.0	2.0	300
H D H 1 0	9.5	3 / 8	21.0	2.0	300
H D H 1 3	12.5	1 / 2	21.0	2.0	300
H D H 1 6	16.0	5 / 8	21.0	2.0	300
H D H 1 9	19.0	3 / 4	21.0	2.0	300
H D H 2 5	25.0	1	21.0	2.0	300
H D M 0 6	6.3	1 / 4	17.6	1.7	250
H D M 0 8	8.0	5 / 1 6	17.6	1.7	250
H D M 1 0	9.5	3 / 8	17.6	1.7	250
H D M 1 3	12.5	1 / 2	17.6	1.7	250
H D M 1 6	16.0	5 / 8	17.6	1.7	250
H D M 1 9	19.0	3 / 4	17.6	1.7	250
H D M 2 5	25.0	1	17.6	1.7	250



CONTRACTOR GRADE
AIR HOSE

Technical Specifications

- Tube

Cover

Reinforcement

Fittings

Pressure

Oil Resistance

Accessories

Advantages
- High Strength, Oil Mist Resistant Rubber

Weather & Ozone Resistant Synthetic Rubber Blend

Single or Multiple Layers of High Strength Polyester Yarn

Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules

W.P.: 200PSI, 250PSI, 300PSI
Exceeds RMA 4:1 Safety Factor *
(Burst Pressure To Working Pressure Ratio)


Exceeds RMA Class ‘C’ Oil Resistance

Bend-Restrictor Sleeve to prevent damage near ends
Thread Protector Cap

High Quality Contractor Grade Hose
Very Good Mechanical Properties
High Burst Strength
Stays Flexible in - 30° F to 190° F



SIZES(IDs)
1/4” to 1”
LENGTHS
25’, 50’, 100’Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

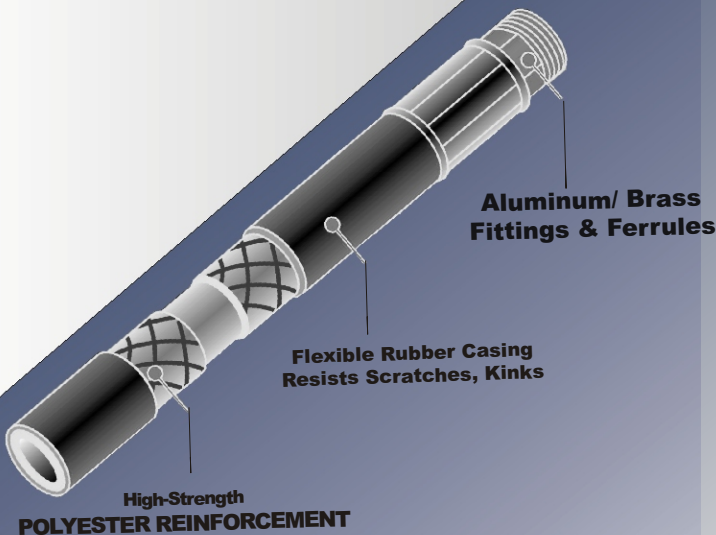

Application Guide:	Excellent			Very Good		Good	
	Light Weight			Cold Weather Flexibility		Resists Twisting	
							Non Marring

Multiple fittings and packing options available.

RAV AIR HOSE COILS - PRE-CUT WITH FITTINGS

Part No .	ID	Length	Fitting	Coils / Carton
W .P . 300PSI/20BAR		TLE Series		
TLE06025	1 / 4 "	25'	1 / 4 " NPT	8
TLE06050	1 / 4 "	50'	1 / 4 " NPT	6
TLE06100	1 / 4 "	100'	1 / 4 " NPT	4
TLE10025	3 / 8 "	25'	1 / 4 " NPT	8
TLE10050	3 / 8 "	50'	1 / 4 " NPT	6
TLE10100	3 / 8 "	100'	1 / 4 " NPT	2
TLE13025	1 / 2 "	25'	3 / 8 " NPT	6
TLE13050	1 / 2 "	50'	3 / 8 " NPT	4
TLE13100	1 / 2 "	100'	3 / 8 " NPT	2
TLE08025*	5 / 16 "	25'	1 / 4 " BSP	8
TLE08050*	5 / 16 "	50'	1 / 4 " BSP	6
TLE08100*	5 / 16 "	100'	1 / 4 " BSP	2
* Safety Ratio 3:1 B.P.:W.P.				

Part No .	ID	Length	Fitting	Coils / Carton
W .P . 200PSI/14BAR		SLE Series		
SLE06025	1 / 4 "	25'	1 / 4 " NPT	8
SLE06050	1 / 4 "	50'	1 / 4 " NPT	6
SLE06100	1 / 4 "	100'	1 / 4 " NPT	4
SLE10025	3 / 8 "	25'	1 / 4 " NPT	8
SLE10050	3 / 8 "	50'	1 / 4 " NPT	6
SLE10100	3 / 8 "	100'	1 / 4 " NPT	2

RAV AIR HOSE COILS - CUSTOM LENGTHS

Part No .	ID		WORKING PRESSURE		
	MM	INCH	BAR	MPa	PSI
TLE06	6.3	1 / 4	21.0	2.0	300
TLE08	8.0	5 / 16	21.0	2.0	300
TLE10	9.5	3 / 8	21.0	2.0	300
TLE13	12.5	1 / 2	21.0	2.0	300
TLE16	16.0	5 / 8	21.0	2.0	300
TLE19	19.0	3 / 4	21.0	2.0	300
TLE25	25.0	1	21.0	2.0	300
SLE06	6.3	1 / 4	14.2	1.4	200
SLE08	8.0	5 / 16	14.2	1.4	200
SLE10	9.5	3 / 8	14.2	1.4	200
SLE13	12.5	1 / 2	14.2	1.4	200
SLE16	16.0	5 / 8	14.2	1.4	200
SLE19	19.0	3 / 4	14.2	1.4	200
SLE25	25.0	1	14.2	1.4	200
OLE (OIL-RESIST)	CUSTOM	CUSTOM	21.0	2.0	300

ROMO


DIY GRADE
AIR HOSE

Technical Specifications

Tube	Oil Mist Resistant Rubber
Cover	High Strength Rubber
Reinforcement	Single or Multiple Layers of High Strength Polyester Yarn
Fittings	Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules
Pressure	W.P.: 150PSI, 200PSI, 300PSI Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)
Oil Resistance	Exceeds RMA Class ‘C’ Oil Resistance
Advantages	Economical, Versatile Air Hose Good Mechanical Properties High Burst Strength



SIZES(IDs)
1/4” to 1”
LENGTHS
25’, 50’, 100’Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

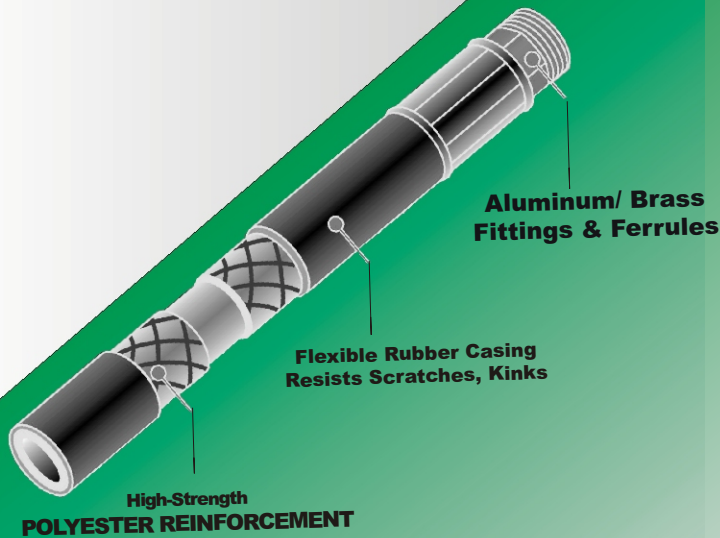

<u>Application Guide:</u>	<div><div></div>Excellent</div>	<div><div></div>Very Good</div>	<div><div></div>Good</div>
	<div><div></div>Light Weight</div>	<div><div></div>Cold Weather Flexibility</div>	<div><div></div>Resists Twisting</div>

Multiple fittings and packing options available.

ROMO AIR HOSE COILS - PRE-CUT WITH FITTINGS

Part No .	ID	Length	Fitting	Coils / Carton
W . P . 300PSI/20BAR		DYH Series		
DYH06025	1 / 4 "	25 '	1 / 4 " N P T	8
DYH06050	1 / 4 "	50 '	1 / 4 " N P T	6
DYH06050	1 / 4 "	100 '	1 / 4 " N P T	4
DYH10025	3 / 8 "	25 '	1 / 4 " N P T	8
DYH10050	3 / 8 "	50 '	1 / 4 " N P T	6
DYH10100	3 / 8 "	100 '	1 / 4 " N P T	2
DYH13025	1 / 2 "	25 '	1 / 4 " N P T	6
DYH13050	1 / 2 "	50 '	1 / 4 " N P T	4
DYH13100	1 / 2 "	100 '	1 / 4 " N P T	2
DYH08025 *	5 / 16 "	25 '	1 / 4 " B S P	8
DYH08050 *	5 / 16 "	50 '	1 / 4 " B S P	6
DYH08100 *	5 / 16 "	100 '	1 / 4 " B S P	2
* Safety Ratio 3:1 B.P.:W.P.				

Part No .	ID	Length	Fitting	Coils / Carton
W . P . 200PSI/14BAR		DYL Series		
DYL06025	1 / 4 "	25 '	1 / 4 " N P T	8
DYL06050	1 / 4 "	50 '	1 / 4 " N P T	6
DYL06100	1 / 4 "	100 '	1 / 4 " N P T	4
DYL10025	3 / 8 "	25 '	1 / 4 " N P T	8
DYL10050	3 / 8 "	50 '	1 / 4 " N P T	6
DYL10100	3 / 8 "	100 '	1 / 4 " N P T	2

ROMO AIR HOSE COILS - CUSTOM LENGTHS

Part No .	ID		WORKING PRESSURE		
	M M	INCH	BAR	M P a	PSI
DYH06	6.3	1 / 4	21.0	2.0	300
DYH08	8.0	5 / 16	21.0	2.0	300
DYH10	9.5	3 / 8	21.0	2.0	300
DYH13	12.5	1 / 2	21.0	2.0	300
DYH16	16.0	5 / 8	21.0	2.0	300
DYH19	19.0	3 / 4	21.0	2.0	300
DYH25	25.0	1	21.0	2.0	300
DYL06	6.3	1 / 4	14.2	1.4	200
DYL08	8.0	5 / 16	14.2	1.4	200
DYL10	9.5	3 / 8	14.2	1.4	200
DYL13	12.5	1 / 2	14.2	1.4	200
DYL16	16.0	5 / 8	14.2	1.4	200
DYL19	19.0	3 / 4	14.2	1.4	200
DYL25	25.0	1	14.2	1.4	200



PRO-GRADE WRAPPED
RUBBER AIR HOSE


TECHNICAL SPECIFICATIONS

Tube	High Strength, Versatile, Oil Mist Resistant Rubber
Cover	Wrap Finish ; Abrasion, Weather & Ozone Resistant EPDM Rubber
Reinforcement	Single or Multiple Layers of High Strength Polyester Yarn
Fittings	Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules
Pressure	W.P.: 300PSI Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)
Oil Resistance	Exceeds RMA Class ‘C’ Oil Resistance
Accessories	Bend-Restrictor Sleeve to prevent damage near ends Thread Protector Cap
Advantages	Special Design for Professionals Lighter & More Flexible Extended Service Life Exceptional Adhesion due to the Wrap Process Stays Flexible in -30F to +190F




SIZES(IDs)
1/4” to 1”
LENGTHS
25’, 50’, 100’Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

Aluminum/ Brass
Fittings & Ferrules



Wrapped Finish gives more flexibility
Extended Service Life &
Better Adhesion

High-Strength
POLYESTER REINFORCEMENT

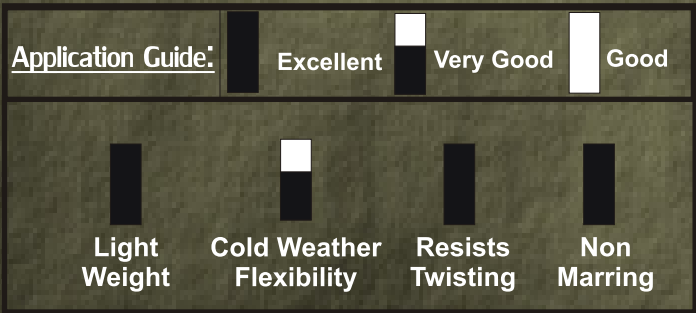

Multiple fittings and packing options available.

DINO-HIDE AIR HOSE COILS - PRE-CUT WITH FITTINGS

Part No .	ID	Length	Fitting	Coils / Carton
W . P . 3 0 0 P S I / 2 0 B A R		W L E Series		
W L E 1 0 0 2 5	3 / 8 "	2 5 '	1 / 4 " N P T	8
W L E 1 0 0 5 0	3 / 8 "	5 0 '	1 / 4 " N P T	6
W L E 1 0 1 0 0	3 / 8 "	1 0 0 '	1 / 4 " N P T	2
W L E 1 3 0 2 5	1 / 2 "	2 5 '	1 / 4 " N P T	6
W L E 1 3 0 5 0	1 / 2 "	5 0 '	1 / 4 " N P T	4
W L E 1 3 1 0 0	1 / 2 "	1 0 0 '	1 / 4 " N P T	2

DINO-HIDE AIR HOSE COILS - CUSTOM LENGTHS

Part No .	ID		WORKING PRESSURE		
	M M	I N C H	B A R	M P a	P S I
W L E 0 6	6.3	1 / 4	21	2	300
W L E 0 8	8.0	5 / 1 6	21	2	300
W L E 1 0	9.5	3 / 8	21	2	300
W L E 1 3	12.5	1 / 2	21	2	300
W L E 1 6	16.0	5 / 8	21	2	300
W L E 1 9	19.0	3 / 4	21	2	300
W L E 2 5	25.0	1	21	2	300




RMA CLASS ‘A’ OIL RESISTANCE
AIR HOSE

Technical Specifications

Tube	High Strength, Oil Mist Resistant Nitrile Rubber
Cover	RMA CLASS ‘A’ OIL RESISTANCE Synthetic Rubber Blend
Reinforcement	RMA CLASS ‘B’ OIL RESISTANCE Single or Multiple Layers of High Strength Polyester Yarn
Fittings	Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules
Pressure	W.P.: 200PSI, 250PSI, 300PSI Exceeds RMA 4:1 Safety Factor *
Accessories	Bend-Restrictor Sleeve to prevent damage near ends Thread Protector Cap
Advantages	High Quality Auto-Shop Hose Excellent Oil Resistance Good Mechanical Properties High Burst Strength



SIZES(IDs)
1/4” to 1”
LENGTHS
25’, 50’, 100’Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

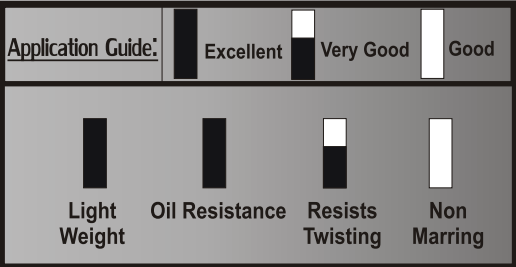

Multiple fittings and packing options available.

For more information and part nos.,please look up the RAV range at page *




FARM & CONTRACTOR
WATER/ GARDEN HOSE

Technical Specifications

Tube	High Strength, Versatile, Oil Mist Resistant Rubber
Cover	Smooth; Abrasion, Weather & Ozone Resistant EPDM Rubber ; Several Finishes available
Reinforcement	Single or Multiple Layers of High Strength Polyester Yarn
Fittings	Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules
Pressure	100:300PSI, 150:500PSI * (Max. Working Pressure: Min. Burst Pressure)
Oil Resistance	Exceeds RMA Class 'C' Oil Resistance
Accessories	Bend-Restrictor Sleeve to prevent damage near ends Thread Protector Cap
Advantages	Heavy Duty for Farm, Ranch & Industrial use Excellent Mechanical Properties High Burst Strength Handles Hot Water upto 180F Stays Flexible in - 40° F to 190° F



SIZES(IDs)
1/2" to 1"
LENGTHS
25', 50', 100'Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

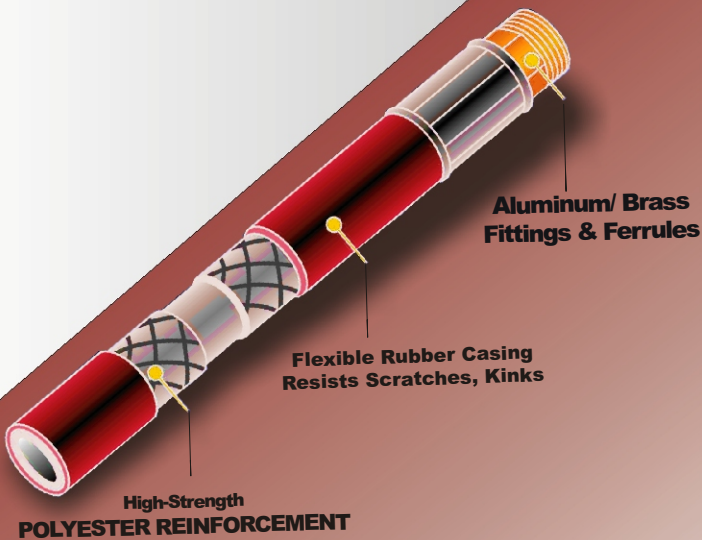

Application Guide:	<div><div></div></div>	Excellent	<div><div></div></div>	Very Good	<div><div></div></div>	Good	
	<div><div></div></div>	Light Weight	<div><div></div></div>	Cold Weather Flexibility	<div><div></div></div>	Resists Twisting	<div><div></div></div>

Multiple fittings and packing options available.

RMX WATER HOSE COILS - PRE-CUT WITH FITTINGS

Part No.	ID	Length	Fitting	Coils / Carton
B.P. 500PSI/ 35 BAR		HDHW SERIES		
HDHW 16025	5 / 8 "	25'	3 / 4" N.H	4
HDHW 16050	5 / 8 "	50'	3 / 4" N.H	4
HDHW 16100	5 / 8 "	100'	3 / 4" N.H	2
HDHW 19025	3 / 4 "	25'	3 / 4" N.H	4
HDHW 19050	3 / 4 "	50'	3 / 4" N.H	3
HDHW 19100	3 / 4 "	100'	3 / 4" N.H	1

Part No.	ID	Length	Fitting	Coils / Carton
B.P. 300PSI/ 20 BAR		HDLW SERIES		
HDLW 13025	1 / 2 "	25'	3 / 4" N.H	4
HDLW 13050	1 / 2 "	50'	3 / 4" N.H	4
HDLW 13100	1 / 2 "	100'	3 / 4" N.H	2
HDLW 16025	5 / 8 "	25'	3 / 4" N.H	4
HDLW 16050	5 / 8 "	50'	3 / 4" N.H	4
HDLW 16100	5 / 8 "	100'	3 / 4" N.H	2
HDLW 19025	3 / 4 "	25'	3 / 4" N.H	4
HDLW 19050	3 / 4 "	50'	3 / 4" N.H	3
HDLW 19100	3 / 4 "	100'	3 / 4" N.H	1

RMX WATER HOSE COILS - CUSTOM LENGTHS

Part No.	ID		WORKING PRESSURE		
	MM	INCH	BAR	MPa	PSI
HDHW13	12.5	1/2	10.2	1	145
HDHW16	16.0	5/8	10.2	1	145
HDHW19	19.0	3/4	10.2	1	145
HDHW25	25.0	1	10.2	1	145
HDLW13	12.5	1/2	7.0	0.7	100
HDLW16	16.0	5/8	7.0	0.7	100
HDLW19	19.0	3/4	7.0	0.7	100
HDLW25	25.0	1	7.0	0.7	100




COMMERCIAL GRADE WATER/ GARDEN HOSE

Technical Specifications

Tube	High Strength, Oil Mist Resistant Rubber
Cover	Weather & Ozone Resistant Synthetic Rubber Blend ; Several Finishes available
Reinforcement	Single or Multiple Layers of High Strength Polyester Yarn
Fittings	Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules
Pressure	100:300PSI, 150:500PSI * (Max. Working Pressure: Min. Burst Pressure)
Oil Resistance	Exceeds RMA Class 'C' Oil Resistance
Accessories	Bend-Restrictor Sleeve to prevent damage near ends
Advantages	Ideal for Home & Commercial Use Very Good Mechanical Properties High Burst Strength Handles Hot Water upto 180F Stays Flexible in -30° F to 190° F



SIZES(IDs)
1/2" to 1"
LENGTHS
25', 50', 100' Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

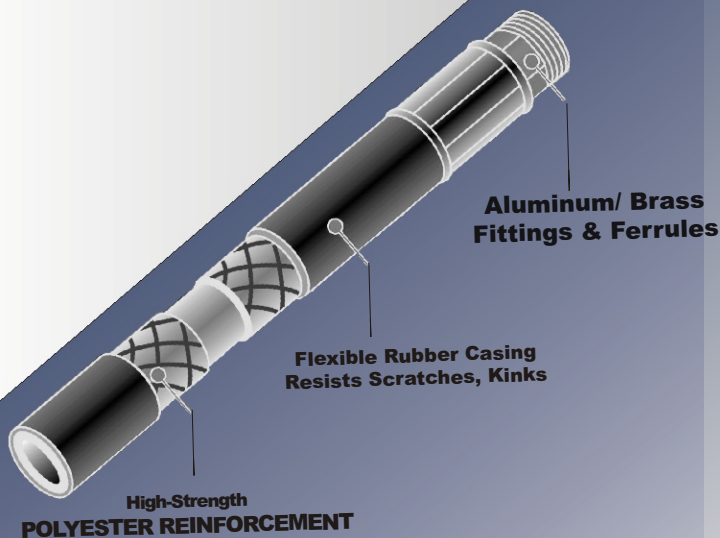

Application Guide:	Excellent	Very Good	Good
Light Weight	Cold Weather Flexibility	Resists Twisting	Non Marring

Multiple fittings and packing options available.

RAV WATER HOSE COILS - PRE-CUT WITH FITTINGS

Part No .	ID	Length	Fitting	Coils / Carton
B . P . 5 0 0 P S I / 3 5 B A R		H W E S E R I E S		
H W E 1 6 0 2 5	5 / 8 "	2 5 '	3 / 4 " N . H	4
H W E 1 6 0 5 0	5 / 8 "	5 0 '	3 / 4 " N . H	4
H W E 1 6 1 0 0	5 / 8 "	1 0 0 '	3 / 4 " N . H	2
H W E 1 9 0 2 5	3 / 4 "	2 5 '	3 / 4 " N . H	4
H W E 1 9 0 5 0	3 / 4 "	5 0 '	3 / 4 " N . H	3
H W E 1 9 1 0 0	3 / 4 "	1 0 0 '	3 / 4 " N . H	1

Part No .	ID	Length	Fitting	Coils / Carton
B . P . 3 0 0 P S I / 2 0 B A R		C G E S E R I E S		
C G E 1 3 0 2 5	1 / 2 "	2 5 '	3 / 4 " N . H	4
C G E 1 3 0 5 0	1 / 2 "	5 0 '	3 / 4 " N . H	4
C G E 1 3 1 0 0	1 / 2 "	1 0 0 '	3 / 4 " N . H	2
C G E 1 6 0 2 5	5 / 8 "	2 5 '	3 / 4 " N . H	4
C G E 1 6 0 5 0	5 / 8 "	5 0 '	3 / 4 " N . H	4
C G E 1 6 1 0 0	5 / 8 "	1 0 0 '	3 / 4 " N . H	2
C G E 1 9 0 2 5	3 / 4 "	2 5 '	3 / 4 " N . H	4
C G E 1 9 0 5 0	3 / 4 "	5 0 '	3 / 4 " N . H	3
C H E 1 9 1 0 0	3 / 4 "	1 0 0 '	3 / 4 " N . H	1

RAV WATER HOSE COILS - CUSTOM LENGTHS

Part No.	ID		WORKING PRESSURE		
	MM	INCH	BAR	MPa	PSI
WGE13	12.5	1/2	10.2	1.0	145
WGE16	16.0	5/8	10.2	1.0	145
WGE19	19.0	3/4	10.2	1.0	145
WGE25	25.0	1	10.2	1.0	145
CGE13	12.5	1/2	7.0	0.7	100
CGE16	16.0	5/8	7.0	0.7	100
CGE19	19.0	3/4	7.0	0.7	100
CGE25	25.0	1	7.0	0.7	100

ROMO


DIY GRADE
WATER/ GARDEN HOSE

Technical Specifications

Tube	Oil Mist Resistant Rubber
Cover	High Strength Rubber; Several Finishes available
Reinforcement	Single or Multiple Layers of High Strength Polyester Yarn
Fittings	Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules
Pressure	100:300PSI, 150:500PSI * (Max. Working Pressure: Min. Burst Pressure)
Accessories	Bend-Restrictor Sleeve to prevent damage near ends
Advantages	Economical General Purpose Water/ Garden Hose Good Mechanical Properties High Burst Strength Handles Hot Water up to 160F



SIZES(IDs)
1/2" to 1"
LENGTHS
25', 50', 100'Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

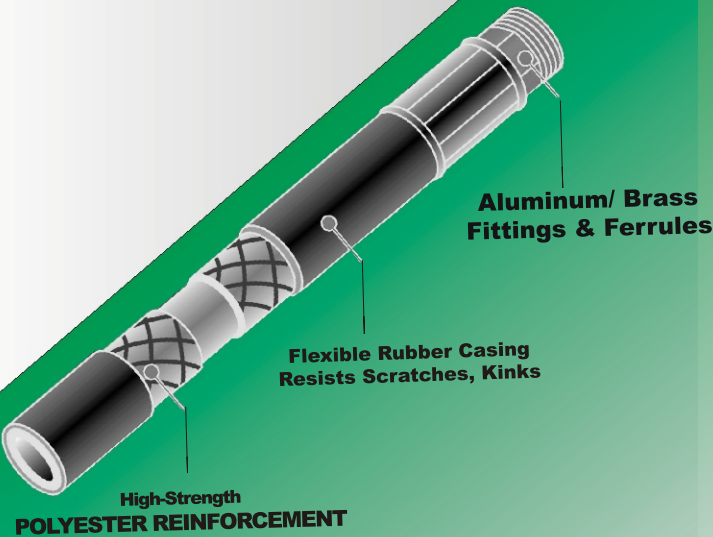

Application Guide:				
	Excellent	Very Good	Good	
Light Weight	Cold Weather Flexibility	Resists Twisting	Non Marring	

Multiple fittings and packing options available.

ROMO WATER HOSE COILS - PRE-CUT WITH FITTINGS

Part No .	ID	Length	Fitting	Coils / Carton
B . P . 5 0 0 P S I / 3 5 B A R		G W H S E R I E S		
G W H 1 6 0 2 5	5 / 8 "	2 5 '	3 / 4 " N . H	4
G W H 1 6 0 5 0	5 / 8 "	5 0 '	3 / 4 " N . H	4
G W H 1 6 1 0 0	5 / 8 "	1 0 0 '	3 / 4 " N . H	2
G W H 1 9 0 2 5	3 / 4 "	2 5 '	3 / 4 " N . H	4
G W H 1 9 0 5 0	3 / 4 "	5 0 '	3 / 4 " N . H	3
G W H 1 9 1 0 0	3 / 4 "	1 0 0 '	3 / 4 " N . H	1

Part No .	ID	Length	Fitting	Coils / Carton
B . P . 3 0 0 P S I / 2 0 B A R		G W L S E R I E S		
G W L 1 3 0 2 5	1 / 2 "	2 5 '	3 / 4 " N . H	4
G W L 1 3 0 5 0	1 / 2 "	5 0 '	3 / 4 " N . H	4
G W L 1 3 1 0 0	1 / 2 "	1 0 0 '	3 / 4 " N . H	2
G W L 1 6 0 2 5	5 / 8 "	2 5 '	3 / 4 " N . H	4
G W L 1 6 0 5 0	5 / 8 "	5 0 '	3 / 4 " N . H	4
G W L 1 6 1 0 0	5 / 8 "	1 0 0 '	3 / 4 " N . H	2
G W L 1 9 0 2 5	3 / 4 "	2 5 '	3 / 4 " N . H	4
G W L 1 9 0 5 0	3 / 4 "	5 0 '	3 / 4 " N . H	3
G W L 1 9 1 0 0	3 / 4 "	1 0 0 '	3 / 4 " N . H	1

ROMO WATER HOSE COILS - CUSTOM LENGTHS

Part No.	ID		WORKING PRESSURE		
	MM	INCH	BAR	MPa	PSI
GWH13	12.5	1/2	10.2	1.0	145
GWH16	16.0	5/8	10.2	1.0	145
GWH19	19.0	3/4	10.2	1.0	145
GWH25	25.0	1	10.2	1.0	145
GWL13	12.5	1/2	7.0	0.7	100
GWL16	16.0	5/8	7.0	0.7	100
GWL19	19.0	3/4	7.0	0.7	100
GWL25	25.0	1	7.0	0.7	100



PRO-GRADE WRAPPED
RUBBER WATER/ GARDEN HOSE

TECHNICAL SPECIFICATIONS

Tube	High Strength, Versatile, Oil Mist Resistant Rubber
Cover	Smooth; Abrasion, Weather & Ozone Resistant Synthetic Rubber Blend; Wrapped Finish
Reinforcement	Single or Multiple Layers of High Strength Polyester Yarn
Fittings	Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules
Pressure	150:500PSI * (Max. Working Pressure: Min. Burst Pressure)
Oil Resistance	Exceeds RMA Class ‘C’ Oil Resistance
Accessories	Bend-Restrictor Sleeve to prevent damage near ends
Advantages	Heavy Duty for Farm, Ranch & Industrial use Excellent Mechanical Properties High Burst Strength Handles Hot Water upto 180F Stays Flexible in - 40° F to 190° F Lighter & More Abrasion Resistant Exceptional Adhesion



SIZES(IDs)
1/2" to 1"
LENGTHS
25', 50', 100'Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

Aluminum/ Brass
Fittings & Ferrules



Wrapped Finish gives more flexibility
Extended Service Life &
Better Adhesion

High-Strength
POLYESTER REINFORCEMENT

Application Guide:	Excellent	Very Good	Good
Light Weight			
Cold Weather Flexibility			
Resists Twisting			
Non Marring			

Multiple fittings and packing options available.

DINO-HIDE WATER HOSE COILS - PRE-CUT WITH FITTINGS

Part No.	ID	Length	Fitting	Coils/ Carton
B.P. 500PSI/ 35BAR		WGE SERIES		
WGE16025	5/8"	25'	3/4" N.H	4
WGE16050	5/8"	50'	3/4" N.H	4
WGE16100	5/8"	100'	3/4" N.H	2
WGE19025	3/4"	25'	3/4" N.H	4
WGE19050	3/4"	50'	3/4" N.H	3
WGE19100	3/4"	100'	3/4" N.H	1

DINO-HIDE WATER HOSE COILS - CUSTOM LENGTHS

Part No.	ID		WORKING PRESSURE		
	MM	INCH	BAR	MPa	PSI
WGE13	12.5	1/2	10.2	1	145
WGE16	16.0	5/8	10.2	1	145
WGE19	19.0	3/4	10.2	1	145
WGE25	25.0	1	10.2	1	145




HEAVY DUTY WELDING HOSE

Technical Specifications

Tube	High Strength, More Resistant to Permeation Oil Mist Resistant Rubber
Cover	Smooth; Abrasion, Weather & Ozone Resistant EPDM Rubber
Reinforcement	Single or Multiple Layers of High Strength Polyester Yarn
Pressure	W.P.: 300PSI Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)
Oil Resistance	Exceeds RMA Class 'C' Oil Resistance
Advantages	Heavy Duty for Professional use Excellent for Oxygen/ Acetylene Gas Welding Also for Brazing and Flame Cutting Applications Excellent Mechanical Properties High Burst Strength Stays Flexible in - 40° F to 190° F



SIZES(IDs)
1/4" to 1"
LENGTHS
25', 50', 100' Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

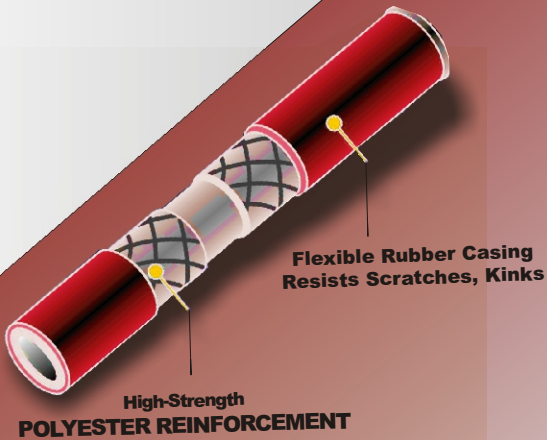

Application Guide:	<div><div></div></div>	Excellent	<div><div></div></div>	Very Good	<div><div></div></div>	Good	
	<div><div></div></div>	Light Weight	<div><div></div></div>	Cold Weather Flexibility	<div><div></div></div>	Resists Twisting	<div><div></div></div>

Multiple fittings and packing options available.




HEAVY DUTY TWIN WELDING HOSE

Technical Specifications

Tube	High Strength, More Resistant to Permeation Oil Mist Resistant Rubber
Cover	Smooth; Abrasion, Weather & Ozone Resistant EPDM Rubber
Reinforcement	Single or Multiple Layers of High Strength Polyester Yarn
Pressure	W.P.: 300PSI Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)
Oil Resistance	Exceeds RMA Class 'C' Oil Resistance
Advantages	Twin Hose for better efficiency Heavy Duty for Professional use Excellent for Oxygen/ Acetylene Gas Welding Also for Brazing and Flame Cutting Applications Excellent Mechanical Properties High Burst Strength Stays Flexible in - 40° F to 190° F



SIZES(IDs)
1/4" to 1"
LENGTHS
25', 50', 100' Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

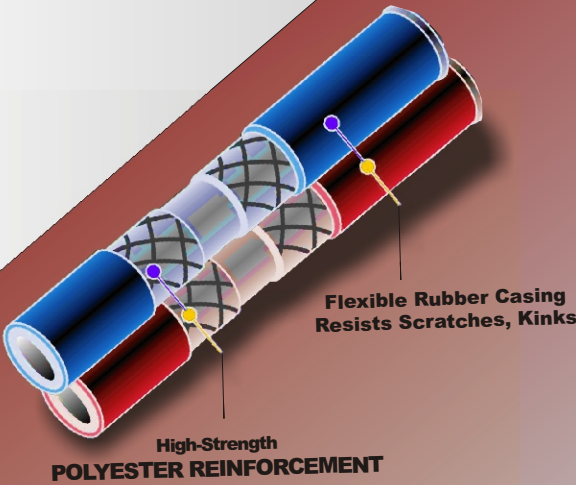

<u>Application Guide:</u>	<div><div></div>Excellent</div>	<div><div></div>Very Good</div>	<div><div></div>Good</div>
	<div><div></div>Light Weight</div>	<div><div></div>Cold Weather Flexibility</div>	<div><div></div>Resists Twisting</div>

Multiple fittings and packing options available.

RMX WELDING HOSE - CUSTOM LENGTHS

Part No.	ID		WORKING PRESSURE		
	MM	INCH	BAR	MPa	PSI
HDG06	6.3	1/4	21	2	300
HDG08	8.0	5/16	21	2	300
HDG09	9.0	11/32	21	2	300
HDG10	9.5	3/8	21	2	300
TWIN					
HDGT06	6.3	1/4	21	2	300
HDGT08	8.0	5/16	21	2	300
HDGT09	9.0	11/32	21	2	300
HDGT10	9.5	3/8	21	2	300

RAV WELDING HOSE - CUSTOM LENGTHS

Part No.	ID		WORKING PRESSURE		
	MM	INCH	BAR	MPa	PSI
IDG06	6.3	1/4	21	2	300
IDG08	8.0	5/16	21	2	300
IDG09	9.0	11/32	21	2	300
IDG10	9.5	3/8	21	2	300
TWIN					
IDGT06	6.3	1/4	21	2	300
IDGT08	8.0	5/16	21	2	300
IDGT09	9.0	11/32	21	2	300
IDGT10	9.5	3/8	21	2	300




PROFESSIONAL GRADE
WELDING HOSE

Technical Specifications

Tube	High Strength, Oil Mist Resistant Rubber
Cover	Weather & Ozone Resistant Synthetic Rubber Blend
Reinforcement	Single or Multiple Layers of High Strength Polyester Yarn
Pressure	W.P.: 300PSI Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)
Oil Resistance	Exceeds RMA Class 'C' Oil Resistance
Advantages	Great for Professional use Very Good for Oxygen/ Acetylene Gas Welding Also for Brazing and Flame Cutting Applications Very Good Mechanical Properties High Burst Strength Stays Flexible in - 30° F to 190° F



SIZES(IDs)
1/4" to 1"
LENGTHS
25', 50', 100' Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

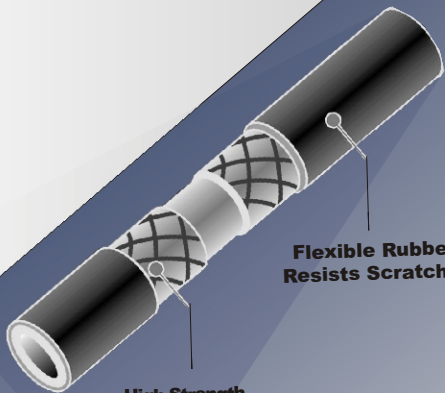

Flexible Rubber Casing
Resists Scratches, Kinks

High-Strength
POLYESTER REINFORCEMENT

Application Guide:

Excellent Very Good Good



Light
Weight



Cold Weather
Flexibility



Resists
Twisting



Non
Marring

Multiple fittings and packing options available.

For more information and part nos., please look up the RAV range at the previous page *




PROFESSIONAL GRADE TWIN WELDING HOSE

Technical Specifications

Tube	High Strength, Oil Mist Resistant Rubber
Cover	Weather & Ozone Resistant Synthetic Rubber
Blend	
Reinforcement	Single or Multiple Layers of High Strength Polyester Yarn
Pressure	W.P.: 300PSI Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)
Oil Resistance	Exceeds RMA Class 'C' Oil Resistance
Advantages	Twin Hose for better efficiency Great for Professional use Very Good for Oxygen/ Acetylene Gas Welding Also for Brazing and Flame Cutting Applications Very Good Mechanical Properties High Burst Strength Stays Flexible in - 30° F to 190° F



SIZES(IDs)
1/4" to 1"
LENGTHS
25', 50', 100'Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

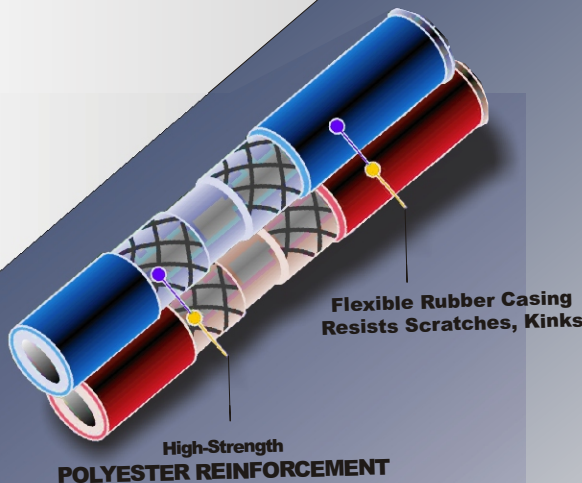

<u>Application Guide:</u>	<div><div></div></div> Excellent	<div><div></div></div> Very Good	<div><div></div></div> Good
	<div><div></div></div> Light Weight	<div><div></div></div> Cold Weather Flexibility	<div><div></div></div> Resists Twisting

Multiple fittings and packing options available.

For more information and part nos.,please look up the RAV range at the previous page *




COMMERCIAL GRADE WELDING HOSE

Technical Specifications

Tube	High Strength, Oil Mist Resistant Rubber
Cover	Weather & Ozone Resistant Synthetic Rubber Blend
Reinforcement	Single or Multiple Layers of High Strength Polyester Yarn
Pressure	W.P.: 300PSI Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)
Oil Resistance	Exceeds RMA Class 'C' Oil Resistance
Advantages	Economical Hose for Basic Welding Good for Oxygen/ Acetylene Gas Welding Also for Brazing and Flame Cutting Applications Good Mechanical Properties High Burst Strength



SIZES(IDs)
1/4" to 1"
LENGTHS
25', 50', 100'Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

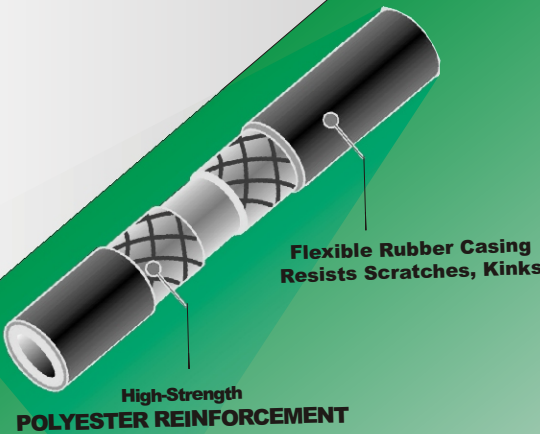

<u>Application Guide:</u>	<div><div></div></div> Excellent	<div><div></div></div> Very Good	<div><div></div></div> Good
	<div><div></div></div> Light Weight	<div><div></div></div> Cold Weather Flexibility	<div><div></div></div> Resists Twisting


Multiple fittings and packing options available.





COMMERICAL GRADE TWIN WELDING HOSE

Tube	High Strength, Oil Mist Resistant Rubber
Cover	Weather & Ozone Resistant Synthetic Rubber Blend
Reinforcement	Single or Multiple Layers of High Strength Polyester Yarn
Pressure	W.P.: 300PSI Exceeds RMA 4:1 Safety Factor [*] (Burst Pressure To Working Pressure Ratio)
Oil Resistance	Exceeds RMA Class ‘C’ Oil Resistance
Advantages	Economical Hose for Basic Welding Twin Hose for better efficiency Good for Oxygen/ Acetylene Gas Welding Also for Brazing and Flame Cutting Applications Good Mechanical Properties High Burst Strength

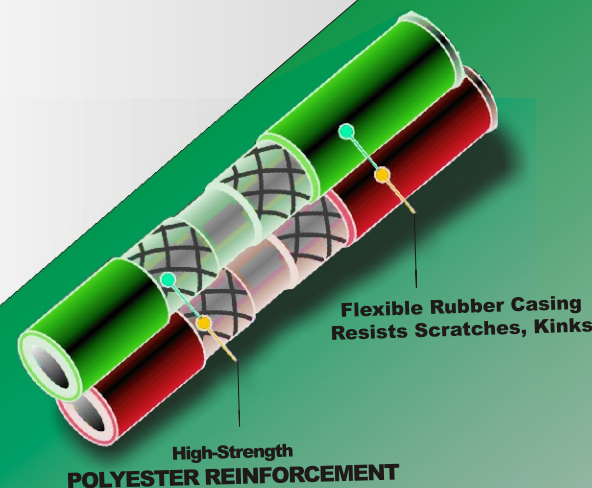

**SIZES(IDs)
1/4" to 1"
LENGTHS
25', 50', 100' Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green**



Application Guide:		Excellent	Very Good	Good
Light Weight				

Multiple fittings and packing options available.

Part No.	ID		WORKING PRESSURE		
	MM	INCH	BAR	MPa	PSI
CG06	6.3	1/4	21	2	300
CG08	8.0	5/16	21	2	300
CG09	9.0	11/32	21	2	300
CG10	9.5	3/8	21	2	300
TWIN					
CGT06	6.3	1/4	21	2	300
CGT08	8.0	5/16	21	2	300
CGT09	9.0	11/32	21	2	300
CGT10	9.5	3/8	21	2	300

Part No.	ID		WORKING PRESSURE		
	MM	INCH	BAR	MPa	PSI
WRG06	6.3	1/4	21	2	300
WRG08	8.0	5/16	21	2	300
WRG09	9.0	11/32	21	2	300
WRG10	9.5	3/8	21	2	300

PRO-GRADE WRAPPED RUBBER WELDING HOSE

TECHNICAL SPECIFICATIONS

Tube	High Strength, Better Permeation Oil Mist Resistant Rubber
Cover	Smooth; Abrasion, Weather & Ozone Resistant EPDM Rubber, Wrapped Finish
Reinforcement	Single or Multiple Layers of High Strength Polyester Yarn
Fittings	Anodized Aluminum/ Brass End Fittings With Anodized Aluminum/ Brass Ferrules
Pressure	W.P.: 300PSI Exceeds RMA 4:1 Safety Factor * (Burst Pressure To Working Pressure Ratio)
Accessories	Bend-Restrictor Sleeve to prevent damage near ends
Advantages	Heavy Duty for Professional use Excellent for Oxygen/ Acetylene Gas Welding Also for Brazing and Flame Cutting Applications Excellent Mechanical Properties High Burst Strength Wrapped Finish gives more flexibility, abrasion resistance Lighter; Exceptional Adhesion Stays Flexible in - 40° F to 190° F



SIZES(IDs)
1/4" to 1"
LENGTHS
25', 50', 100' Coils
Custom Lengths
COLORS
Red, Blue, Black
Yellow, Green

Aluminum/ Brass
Fittings & Ferrules



Wrapped Finish gives more flexibility
Extended Service Life &
Better Adhesion

High-Strength
POLYESTER REINFORCEMENT

Application Guide:			
	Excellent	Very Good	Good
Light Weight			
Cold Weather Flexibility			
Resists Twisting			
Non Marring			

Multiple fittings and packing options available.

For more information and part nos., please look up the DINO-HIDE range at the previous page *

ALSO AVAILABLE



Air Hose Remnants

ID: 3/8"
Length: 8-15'
200, 300PSI

Air Hose Lead

ID: 3/8"
Length: 3'
200, 300PSI

Minimum Specifications equivalent to ROMO Air Hose.*


Accessories & Add-ons



Bend-Restrictor
reduces kinking



Thread Protector



**Hose Extender
Coupling**

FITTINGS



NPT & BSP
in Brass/ Anodized Aluminum
Steel Water Hose Fittings
Other types can be arranged for larger orders

HOSE PACKING OPTIONS

TACO-SHELL PACKING



SHRINK-WRAP WITH LABEL



GARDEN HOSE PACKING



DELIVERY OPTIONS



To good business
To great quality

Thank You for your interest.

R.M. EXPORTS

72-73 Industrial Estate Extention
Jalandhar, Punjab - 144012, India
Ph: +91 181 2611120, +91 9872997902
Email: sales@rmexports.com
krastogi@rmexports.com

www.rmexports.com

